


OWATROL®

DEKS OLJE D1®

HARDWOOD OIL SATURATOR

USAGE

- Exterior: garden furniture, doors, fences, stairs, decks, boats...etc.
- Interior: parquet floors, doors, windows, stairs, frames...etc.
- Horizontal and Vertical.
- Hardwoods and Exotic Tropical woods such as teak, ipé, bovinga, bolondo and iroco.
- Can be applied above and below the water line. Provides excellent base for traditional underwater coatings.

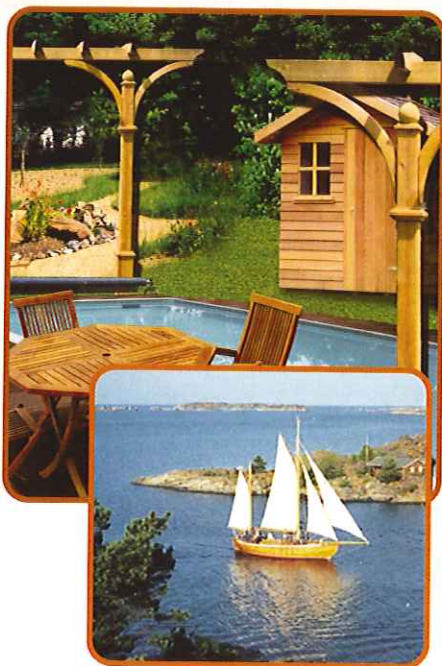

PROPERTIES

- Adapted to thick, dense, greasy and difficult to impregnate woods.
- Drives out moisture and air by penetrating deep into pores, non film building.
- Protects against humidities and its' effects.
- Transparent – keeps the woods natural appearance.
- A matt and natural appearance. (For a glossy appearance topcoat with Deks Olje D2.)

APPLICATION

- Apply a coat of Deks Olje D1® until wood is saturated. Allow drying for 15 – 30 minutes.
- Repeat as many times as necessary until wood will not absorb any more (saturated).
- Apply wet-on-wet, do not allow drying between coats.
- Once surface is saturated, wipe off any excess product to avoid stains and traces of shine when dry.
- Easy maintenance: clean with soap and water and apply – no need for sanding or hard scrubbing.

COVERAGE RATE WHEN WORKING WET (COAT)	COVERAGE RATE FOR MAINTENANCE	APPLICATION TOOLS	TEMPERATURE FOR APPLICATION	DRYING TIME 24 hours SETTING UP FIVE BEFORE USE 3 days	CLEAN UP WHITE SPOT	
1 to 4 m ² /l	8 to 12 m ² /l		+35°C +5°C			INTERIOR EXTERIOR